

## Drop-in Isolators

Part Number: KTDI- 402


### Main Features:

- Broad Option of Frequency Range: 3.5GHz - 6.5GHz
- High Isolation, Low Insertion Loss, Small Size
- Wide Operating Temperature: -30°C~+70°C
- Commercial, Military and Space Applications

### Electrical Specifications at Room Temperature:

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Reverse Power (W)	Connector Type
KTDI-402	3.5 - 6.5	300	0.3	25	1.20	10	TAB
KTDI-402	3.5 - 6.5	600	0.4	23	1.20	10	TAB

### Mechanical Dimensions (mm):

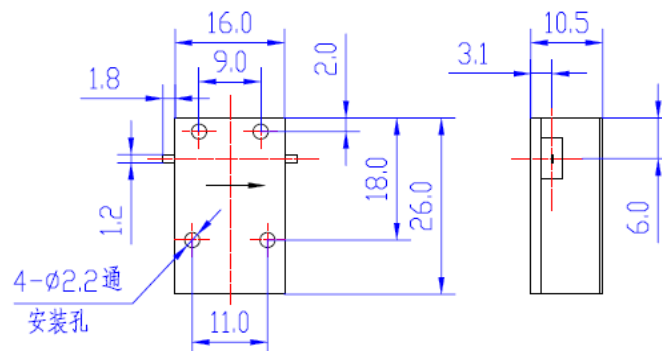

### HOW TO ORDER

