


Coaxial Terminations

Part Number: CT50-5-N2-3


Electrical Specifications

- ✧ **Nominal Impedance:** 50 Ω
- ✧ **Power Rating:** 5W
- ✧ **Frequency:** DC-3GHz
- ✧ **VSWR (Max.):** 1.20:1
- ✧ **Connector Type:** N(Male)
- ✧ **Operating Temperature:** -55°C to +85°C
- ✧ **Dimension:** Φ30*50mm
- ✧ **Tolerance:** ±2%
- ✧ **Net Weight:** 62g
- ✧ **RoHS Compliant**

Outline Drawing (mm)



HOW TO ORDER

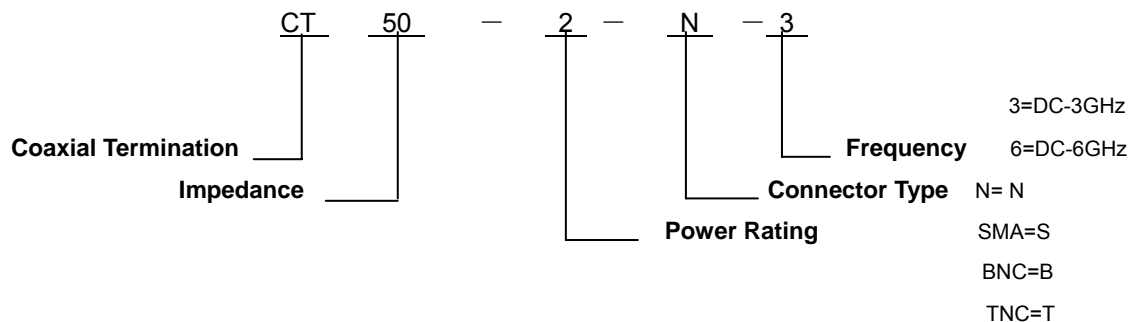


Coaxial Terminations

Part Number: CT50-5-N2-6


Electrical Specifications

- ✧ **Nominal Impedance:** 50 Ω
- ✧ **Power Rating:** 5W
- ✧ **Frequency:** DC-6GHz
- ✧ **VSWR (Max.):** 1.30:1
- ✧ **Connector Type:** N(Male)
- ✧ **Operating Temperature:** -55°C to +85°C
- ✧ **Dimension:** Φ30*50mm
- ✧ **Tolerance:** ±2%
- ✧ **Net Weight:** 62g
- ✧ **RoHS Compliant**

Outline Drawing (mm)



HOW TO ORDER

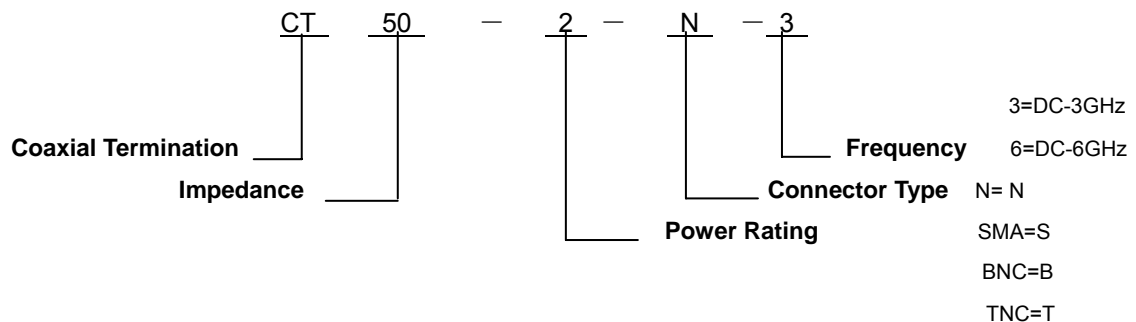


Coaxial Terminations

Part Number: CT50-5-N2-12.4


Electrical Specifications

- ✧ **Nominal Impedance:** 50 Ω
- ✧ **Power Rating:** 5W
- ✧ **Frequency:** DC-12.4GHz
- ✧ **VSWR (Max.):** 1.40:1
- ✧ **Connector Type:** N(Male)
- ✧ **Operating Temperature:** -55°C to +85°C
- ✧ **Dimension:** Φ30*50mm
- ✧ **Tolerance:** ±2%
- ✧ **Net Weight:** 62g
- ✧ **RoHS Compliant**

Outline Drawing (mm)

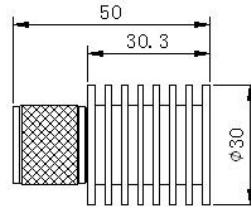

HOW TO ORDER

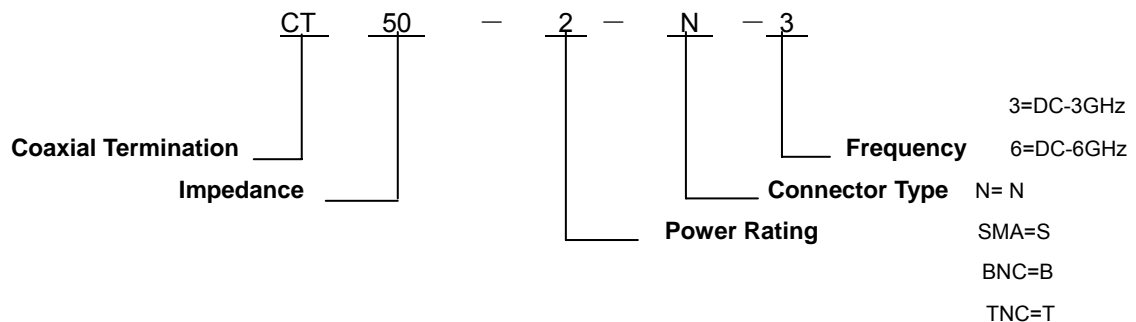


Coaxial Terminations

Part Number: CT50-5-N2-18

Electrical Specifications

- ✧ **Nominal Impedance:** 50 Ω
- ✧ **Power Rating:** 5W
- ✧ **Frequency:** DC-18GHz
- ✧ **VSWR (Max.):** 1.50:1
- ✧ **Connector Type:** N(Male)
- ✧ **Operating Temperature:** -55°C to +85°C
- ✧ **Dimension:** Φ30*50mm
- ✧ **Tolerance:** ±2%
- ✧ **Net Weight:** 62g
- ✧ **RoHS Compliant**

Outline Drawing (mm)

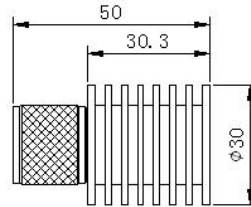

HOW TO ORDER

