


**Coaxial Attenuators**

**Part Number: CA50-XX-N3-3**


**Electrical Specifications**

- ✧ **Nominal Impedance:** 50 Ω
- ✧ **Power Rating:** 50W
- ✧ **Frequency:** DC-3GHz
- ✧ **VSWR (Max.):** 1.20:1
- ✧ **Attenuation & Tol. :**
  - 1-10dB ±0.6dB
  - 11-20dB ±0.8dB
  - 21-30dB ±1.0dB
- ✧ **Connector Type:** N(Male/Female)
- ✧ **Operating Temperature:** -55℃ to +85℃
- ✧ **Dimension:** Φ45\*143mm
- ✧ **Tolerance:** ±2%
- ✧ **Net Weight:** 271g
- ✧ **RoHS Compliant**

**Outline Drawing (mm)**

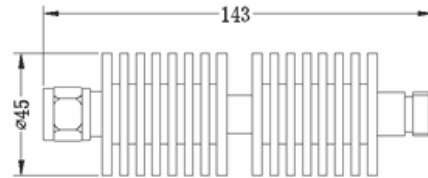

**HOW TO ORDER**

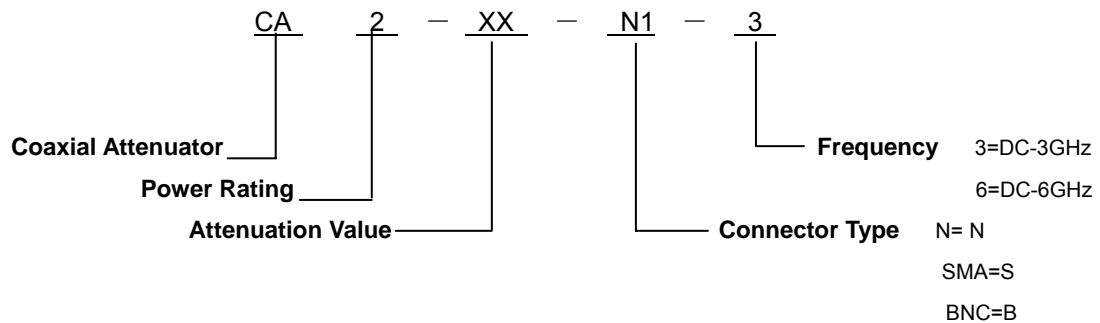


**Coaxial Attenuators**

**Part Number: CA50-XX-N3-8**


**Electrical Specifications**

- ✧ **Nominal Impedance:** 50 Ω
- ✧ **Power Rating:** 50W
- ✧ **Frequency:** DC-8GHz
- ✧ **VSWR (Max.):** 1.30:1
- ✧ **Attenuation & Tol. :**
  - 1-10dB ±0.7dB
  - 11-20dB ±0.9dB
  - 21-30dB ±1.0dB
- ✧ **Connector Type:** N(Male/Female)
- ✧ **Operating Temperature:** -55°C to +85°C
- ✧ **Dimension:** Φ45\*143mm
- ✧ **Tolerance:** ±2%
- ✧ **Net Weight:** 271g
- ✧ **RoHS Compliant**

**Outline Drawing (mm)**

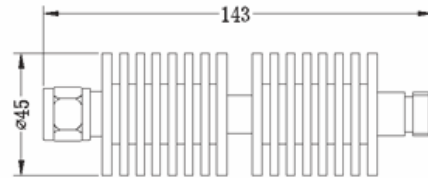

**HOW TO ORDER**

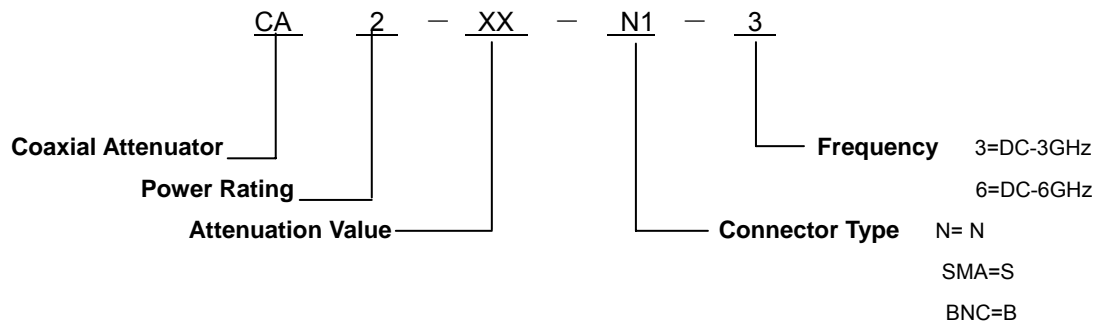


**Coaxial Attenuators**

**Part Number: CA50-XX-N3-12.4**


**Electrical Specifications**

- ✧ **Nominal Impedance:** 50 Ω
- ✧ **Power Rating:** 50W
- ✧ **Frequency:** DC-12.4GHz
- ✧ **VSWR (Max.):** 1.40:1
- ✧ **Attenuation & Tol. :**
  - 1-10dB ±0.9dB
  - 11-20dB ±1.1dB
  - 21-30dB ±1.1dB
- ✧ **Connector Type:** N(Male/Female)
- ✧ **Operating Temperature:** -55°C to +85°C
- ✧ **Dimension:** Φ45\*143mm
- ✧ **Tolerance:** ±2%
- ✧ **Net Weight:** 271g
- ✧ **RoHS Compliant**

**Outline Drawing (mm)**

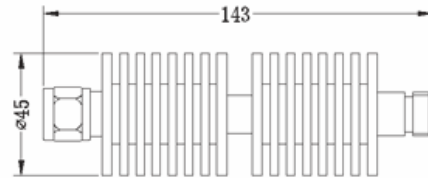

**HOW TO ORDER**

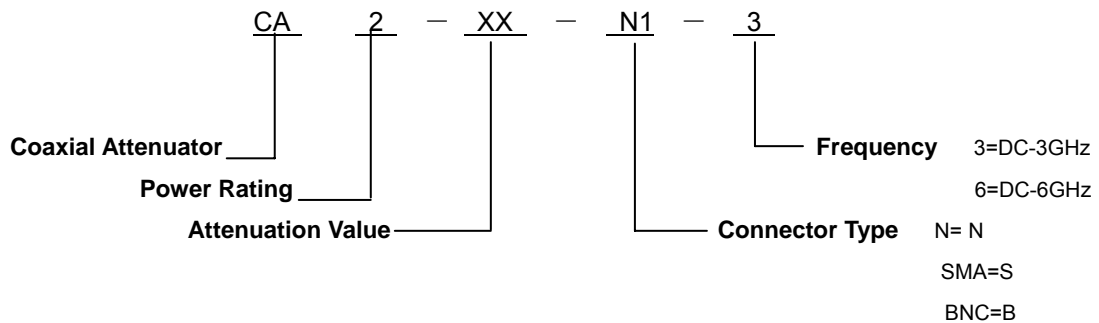


**Coaxial Attenuators**

**Part Number: CA50-XX-N3-18**

**Electrical Specifications**

- ✧ **Nominal Impedance:** 50 Ω
- ✧ **Power Rating:** 50W
- ✧ **Frequency:** DC-18GHz
- ✧ **VSWR (Max.):** 1.45:1
- ✧ **Attenuation & Tol. :**
  - 1-10dB ±1.3dB
  - 11-20dB ±1.3dB
  - 21-30dB ±1.4dB
- ✧ **Connector Type:** N(Male/Female)
- ✧ **Operating Temperature:** -55°C to +85°C
- ✧ **Dimension:** Φ45\*143mm
- ✧ **Tolerance:** ±2%
- ✧ **Net Weight:** 271g
- ✧ **RoHS Compliant**

**Outline Drawing (mm)**

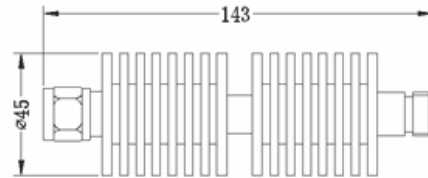

**HOW TO ORDER**

