


Coaxial Attenuators

Part Number: CA10-XX-S2-3


Electrical Specifications

- ✧ **Nominal Impedance:** 50 Ω
- ✧ **Power Rating:** 10W
- ✧ **Frequency:** DC-3GHz
- ✧ **VSWR (Max.):** 1.20:1
- ✧ **Attenuation & Tol. :**
 - 1-10dB ±0.6dB
 - 11-20dB ±0.8dB
 - 21-30dB ±1.0dB
- ✧ **Connector Type:** SMA(Male/Female)
- ✧ **Operating Temperature:** -55°C to +85°C
- ✧ **Dimension:** Φ 16.5*47mm
- ✧ **Tolerance:** ±2%
- ✧ **Net Weight:** 20g
- ✧ **RoHS Compliant**

Outline Drawing (mm)



HOW TO ORDER

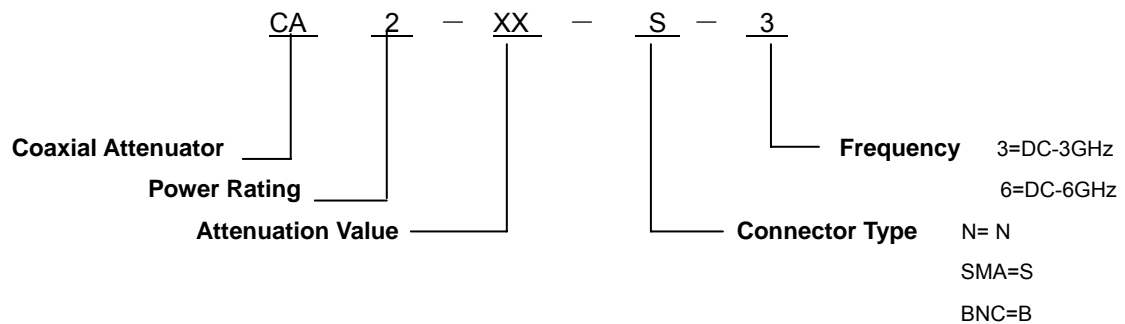


Coaxial Attenuators

Part Number: CA10-XX-S2-6


Electrical Specifications

- ✧ **Nominal Impedance:** 50 Ω
- ✧ **Power Rating:** 10W
- ✧ **Frequency:** DC-6GHz
- ✧ **VSWR (Max.):** 1.30:1
- ✧ **Attenuation & Tol. :**
 - 1-10dB ±0.6dB
 - 11-20dB ±0.8dB
 - 21-30dB ±1.0dB
- ✧ **Connector Type:** SMA(Male/Female)
- ✧ **Operating Temperature:** -55°C to +85°C
- ✧ **Dimension:** Φ 16.5*47mm
- ✧ **Tolerance:** ±2%
- ✧ **Net Weight:** 20g
- ✧ **RoHS Compliant**

Outline Drawing (mm)



HOW TO ORDER

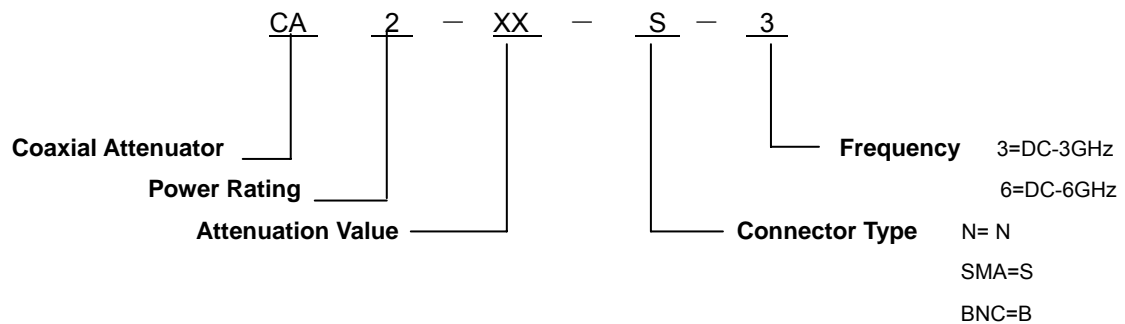


Coaxial Attenuators

Part Number: CA10-XX-S2-8


Electrical Specifications

- ✧ **Nominal Impedance:** 50 Ω
- ✧ **Power Rating:** 10W
- ✧ **Frequency:** DC-8GHz
- ✧ **VSWR (Max.):** 1.30:1
- ✧ **Attenuation & Tol. :**
 - 1-10dB ±0.6dB
 - 11-20dB ±0.8dB
 - 21-30dB ±1.0dB
- ✧ **Connector Type:** SMA(Male/Female)
- ✧ **Operating Temperature:** -55°C to +85°C
- ✧ **Dimension:** Φ 16.5*47mm
- ✧ **Tolerance:** ±2%
- ✧ **Net Weight:** 20g
- ✧ **RoHS Compliant**

Outline Drawing (mm)



HOW TO ORDER

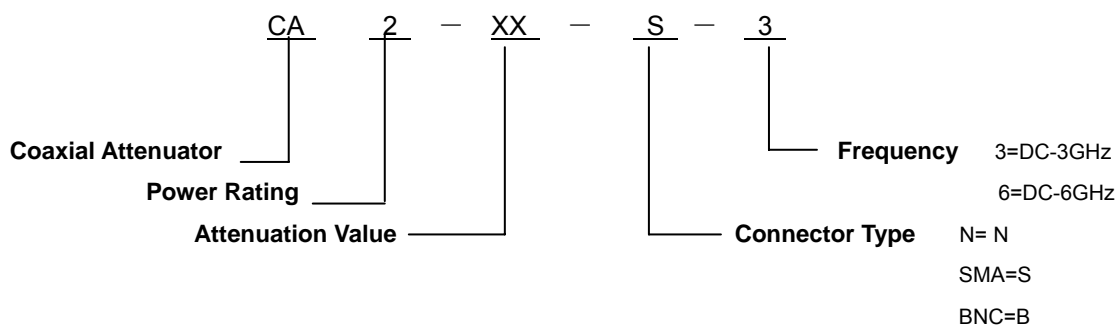


Coaxial Attenuators

Part Number: CA10-XX-S2-12.4


Electrical Specifications

- ✧ **Nominal Impedance:** 50 Ω
- ✧ **Power Rating:** 10W
- ✧ **Frequency:** DC-12.4GHz
- ✧ **VSWR (Max.):** 1.35:1
- ✧ **Attenuation & Tol. :**
 - 1-10dB ±0.8dB
 - 11-20dB ±0.8dB
 - 21-30dB ±1.0dB
- ✧ **Connector Type:** SMA(Male/Female)
- ✧ **Operating Temperature:** -55°C to +85°C
- ✧ **Dimension:** Φ 16.5*47mm
- ✧ **Tolerance:** ±2%
- ✧ **Net Weight:** 20g
- ✧ **RoHS Compliant**

Outline Drawing (mm)



HOW TO ORDER

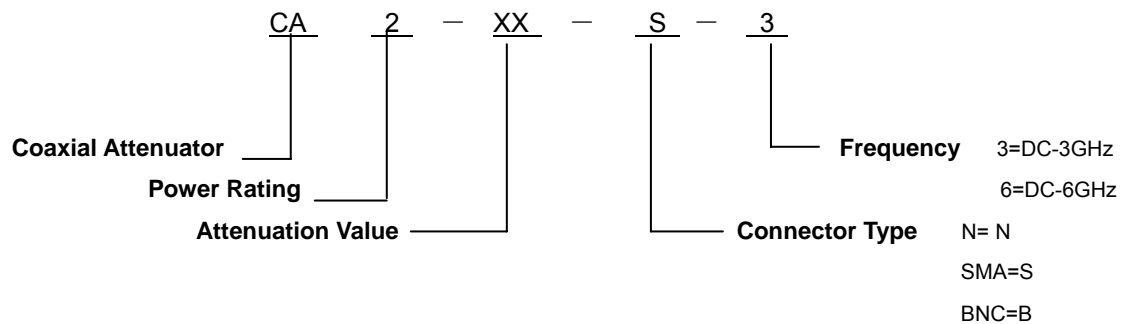


Coaxial Attenuators

Part Number: CA10-XX-S2-18

Electrical Specifications

- ✧ **Nominal Impedance:** 50 Ω
- ✧ **Power Rating:** 10W
- ✧ **Frequency:** DC-18GHz
- ✧ **VSWR (Max.):** 1.45:1
- ✧ **Attenuation & Tol. :**
 - 1-10dB ±0.9dB
 - 11-20dB ±1.1dB
 - 21-30dB ±1.1dB
- ✧ **Connector Type:** SMA(Male/Female)
- ✧ **Operating Temperature:** -55°C to +85°C
- ✧ **Dimension:** Φ 16.5*47mm
- ✧ **Tolerance:** ±2%
- ✧ **Net Weight:** 20g
- ✧ **RoHS Compliant**

Outline Drawing (mm)



HOW TO ORDER

