

Drop-in Circulators

Part Number: KTDC- 402A


Main Features:

- Broad Option of Frequency Range: 3.5GHz - 8.0GHz
- High Isolation, Low Insertion Loss, Small Size
- Wide Temperature Range: -40°C~+70°C
- Commercial, Military and Space Applications

Electrical Specifications at Room Temperature:

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Average Power (W)	Connector Type
KTDC-402A	3.5 - 8.0	300	0.3	23	1.20	20	TAB
KTDC-402A	3.5 - 8.0	600	0.4	23	1.20	20	TAB

Mechanical Dimensions (mm):

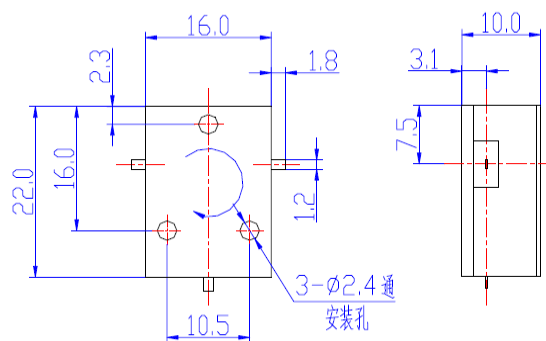

HOW TO ORDER

