

Waveguide High Power Circulators

Part Number: KTWC70-68.3A


Key Features

- Broad Frequency Range: 5.38GHz-8.18GHz
- High Peak Power: 5000W
- High Isolation, Low Insertion Loss
- Wide Operating Temperature Range: -40°C~+85°C
- Commercial, Military and Space Applications

Electrical Specifications at Room (25°C±5°C) Temperature

Part Number	Freq. Range (GHz)	Relative Bandwidth	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Peak Power (W)	Duty Ratio	Waveguide Type
KTWC70-68.3A	5.38 - 8.18	10%	0.3	20	1.25	5000	10%	WR137

Mechanical Dimensions (mm)

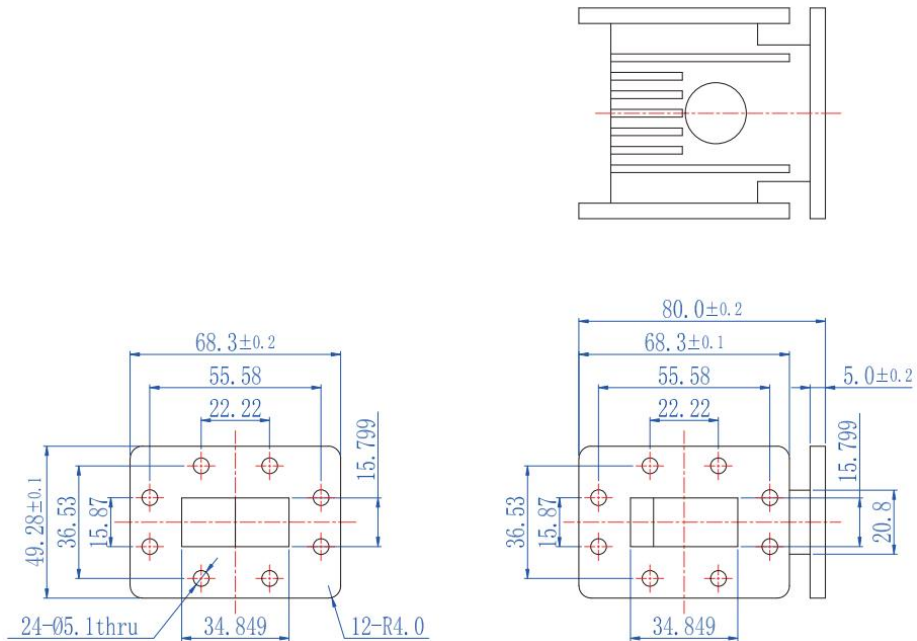

HOW TO ORDER

