

Drop-in Isolators

Part Number: KTDI-1002L


Key Features

- Frequency Range: 14GHz-18GHz
- Low Insertion Loss, High Isolation
- Small Size, Good Performance
- Wide Operating Temperature Range : -40°C~+85°C
- Commercial, Military and Space Applications

Electrical Specifications at Room (25°C±5°C) Temperature

Part Number	Freq. Range (GHz)	Relative Bandwidth	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Reverse Power (W)	Connector Type
KTDI-1002L	14 - 18	15%	0.6	20	1.25	10	TAB

Mechanical Dimensions (mm)

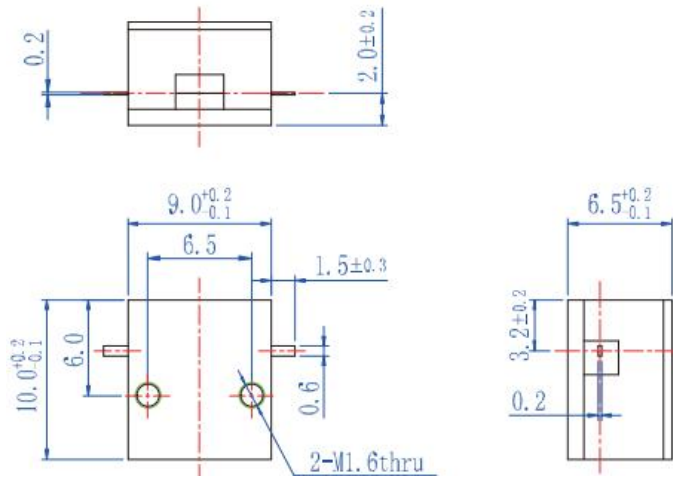

HOW TO ORDER

