

KEC70G (.760" x .760")


◆ Product Features

High Q, High RF Current/Voltage, High RF Power, Low ESR/ESL, Low Noise,
Ultra-Stable Performance.

◆ KEC70G Capacitance Table

Cap.pF	Code	Tol.	Rated WVDC	Cap.pF	Code	Tol.	Rated WVDC	Cap.pF	Code	Tol.	Rated WVDC
1.0	1R0	B,C, D	5000V Code502 Extended Voltage 8000V Code802	33	330	F,G, J	5000V Code502 Extended Voltage 8000V Code802	1000	102	G,J	3000V Code302 Extended Voltage 5000V Code502
1.2	1R2			39	390			1200	122		
1.5	1R5			47	470			1500	152		
1.8	1R8			56	560			1800	182		
2.2	2R2			68	680			2200	222		
2.7	2R7			82	820			2700	272		
3.3	3R3			100	101			3300	332		
3.9	3R9			120	121			4700	472		
4.7	4R7			150	151			5100	512		
5.6	5R6			180	181			5600	562		
6.8	6R8	F,G, J		220	221		3000V Code302 Extended Voltage 5000V Code502	6800	682	G,J	1000V Code102 Extended Voltage 3000V Code302
8.2	8R2			270	271			7500	752		
10	100			300	301			8200	822		
12	120			390	391			10000	103		
15	150			470	471			12000	123		
18	180			560	561			15000	153		
22	220			680	681			18000	183		
27	270			820	821			20000	203		2000V Code 202


◆ Part Numbering

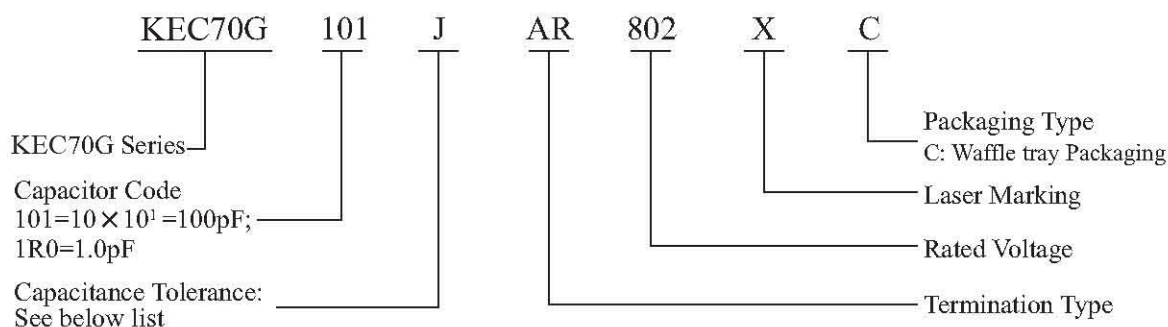


Code	B	C	D	F	G	J
Tolerance	± 0.1pF	± 0.25pF	± 0.5pF	± 1%	± 2%	± 5%

◆ **KEC70G Capacitor Dimensions**

unit:inch(millimeter)

Series	Term. Code	Type/Outlines	Capacitor Dimensions				Lead Dimensions			Plated Material
			Length (L _c)	Width (W _c)	Thick. (T _c)	Overlap (B)	Length (L _L)	Width (W _L)	Thickness (T _L)	
70G	W		.760 +0.15 to -0.10 (19.30 ±0.38 to -0.25)	.760 ±0.10 (19.30± 0.25)	.197 (5.00) max	.063 (1.60) max	—	—	—	100% Sn over Nickel Plating
	L	Chip								90 Sn10Pb over Nickel Plating
70G	MS					.748 ± (19.00) min	.591 ± .010 (15.00 ±0.25)	.008 ± .001 (0.20 ±0.025)	Silver- plated Copper	
70G	AR					—	Dia.=.030±.004 (0.80±0.10)			
70G	RW							.748 (19.00) min		
70G	AW							.906 (23.00) min		

Series	Term. Code	Type/Outlines	Capacitor Dimensions				Lead Dimensions			Plated Material
			Length (L _c)	Width (W _c)	Thick. (T _c)	Overlap (B)	Length (L _L)	Width (W _L)	Thickness (T _L)	
70G	P	 Chip (Non-Mag)	.760 +0.15 to -0.10 (19.30 ±0.38 to -0.25)	.760 ±0.10 (19.30± 0.25)	.197 (5.00) max	.063 (1.60) max	—	—	—	Non-mag, Copper Plated 100% Sn
70G	MN	 Microstrip (Non-Mag)				.748 (19.00) min	.591 ± .010 (15.00 ±0.25)	.008 ± .001 (0.20 ±0.025)	Silver-plated Copper	
70G	AN	 Axial Ribbon (Non-Mag)								
70G	RN	 Radial Wire (Non-Mag)								
70G	BN	 Axial Wire (Non-Mag)								

◆ Performance

Item	Specifications
Quality Factor (Q)	No less than 1000pF, Q value more than 2000, Test frequency 1MHz; More than 1000pF, Q value more than 2000, Test frequency 1KHz;
Insulation Resistance (IR)	Test Voltage: 500V 10 ⁵ Megohms min. @ +25°C at rated WVDC. 10 ⁴ Megohms min. @ +125°C at rated WVDC.
Rated Voltage	See Rated Voltage Table
Dielectric Withstanding Voltage (DWV)	250% of Rated Voltage for 5 seconds, Rated Voltage ≤ 500VDC 150% of Rated Voltage for 5 seconds, 500VDC < Rated Voltage ≤ 1250VDC 120% of Rated Voltage for 5 seconds, Rated Voltage > 1250VDC
Operating Temperature Range	−55°C to +175°C
Temperature Coefficient (TC)	0 ± 30 ppm/°C (−55°C to +125°C)
Capacitance Drift	± 0.02% or ± 0.02pF, whichever is greater.
Piezoelectric Effects	None


Capacitors are designed and manufactured to meet the requirements of MIL-PRF-55681 and MIL-PRF-123.

◆ Environmental Tests


Item	Specifications	Method
Thermal Shock	DWV: the initial value IR: Shall not be less than 30% of the initial value Capacitance change: no more than 0.5% or 0.5pF, whichever is greater.	MIL-STD-202, Method 107, Condition A. At the maximum rated temperature (−55°C and 125°C) stay 30 minutes. The time of removing shall not be more than 3 minutes. Perform the five cycles.
Moisture Resistance		MIL-STD-202, Method 106.
Humidity (steady state)	DWV: the initial value IR: the initial value Capacitance change: no more than 0.3% or 0.3pF, whichever is greater.	MIL-STD-202, Method 103, Condition A, with 1.5 Volts D.C. applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours minimum.
Life	IR: Shall not be less than 30% of the initial value Capacitance change: no more than 2.0% or 0.5pF, whichever is greater.	MIL-STD-202, Method 108, for 2000 hours, at 125°C. 200% of Rated Voltage for Capacitors, Rated Voltage ≤ 500VDC 120% of Rated Voltage for Capacitors, 500VDC < Rated Voltage ≤ 1250VDC 100% of Rated Voltage for Capacitors, Rated Voltage > 1250VDC
Terminal Strength	Microstrip: more than 20 N; Lead wire: more than 10 N.	MIL-STD-202, Method 211.

◆ **KEC70G Performance Curve**


Self Resonant Frequency vs
Capacitance

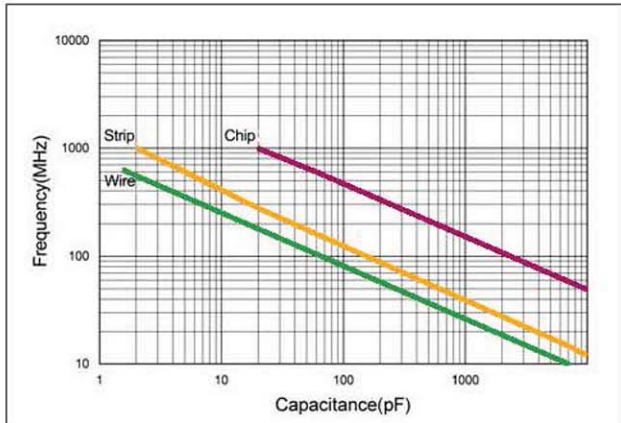


ESR vs Capacitance
measured @ 30MHz

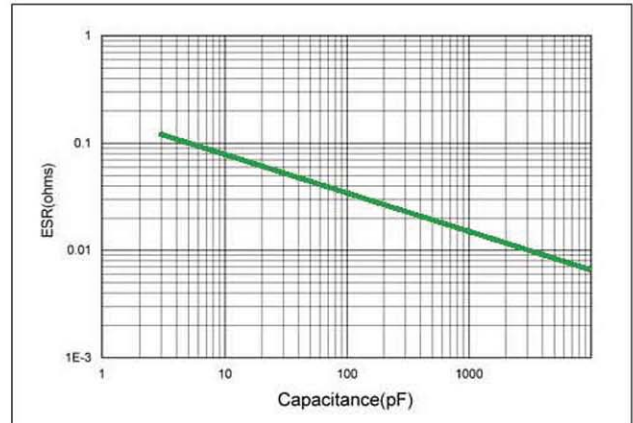

% Maximum Current vs
Ambient Temperature

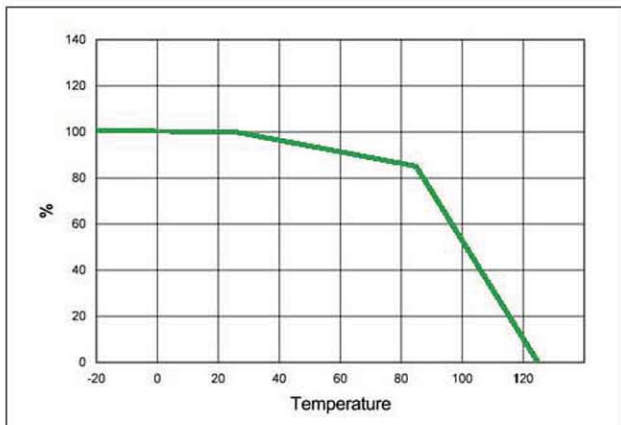

KEC70G Wire Terminals
Rated Current vs Frequency

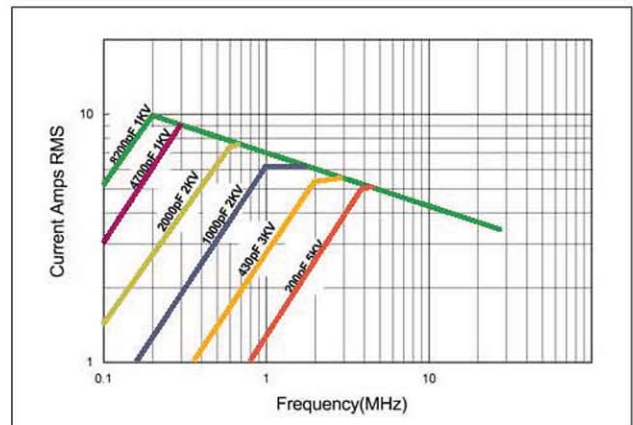

KEC70G Strip Terminals
Rated Current vs Frequency

