

Waveguide Circulators

Part Number: KTWC740-25.4


Key Features

- Broad Frequency Range: 60.5GHz-92.0GHz
- High Isolation, Low Insertion Loss, Small Size
- Wide Operating Temperature Range: -40°C~+85°C
- Commercial, Military and Space Applications

Electrical Specifications at Room (25°C±5°C) Temperature

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Waveguide Type
KTWC740-25.4	60.5 - 92.0	1000	0.8	18	1.30	WR12
KTWC740-25.4	60.5 - 92.0	2000	1.0	17	1.35	WR12

Mechanical Dimensions (mm)

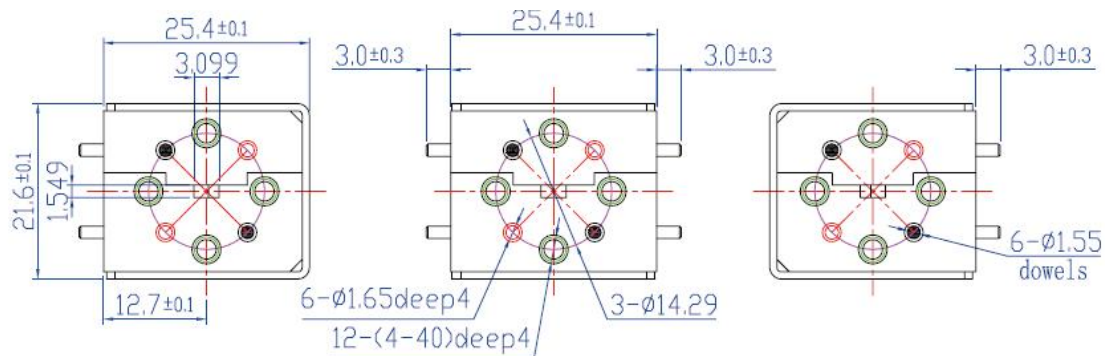

HOW TO ORDER

