

Drop-in Circulators

Part Number: KTDC-1002C2


Key Features

- Frequency Range: 7GHz-18GHz
- Low Insertion Loss, High Isolation
- Small Size, High Performance
- Wide Operating Temperature Range: -40°C~+70°C
- Commercial, Military and Space Applications

Electrical Specifications at Room (25°C±5°C) Temperature

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Forward Power (W)	Connector Type
KTDC-1002C2	7 - 18	300	0.3	23	1.20	10	TAB
KTDC-1002C2	7 - 18	1200	0.4	20	1.25	10	TAB

Mechanical Dimensions (mm)

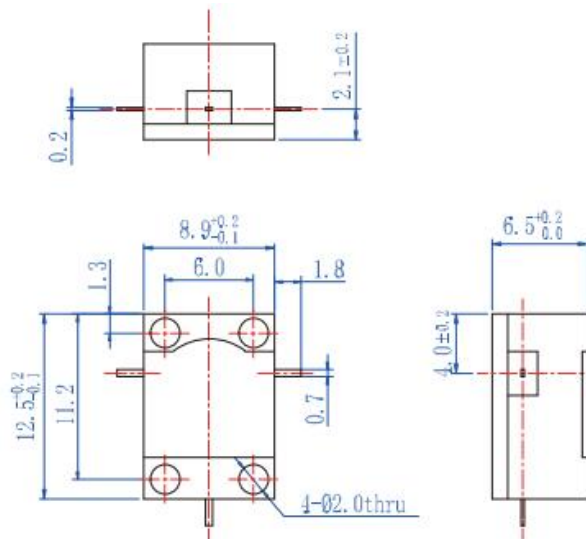

HOW TO ORDER

