

Drop-in Circulators

Part Number: KTDC-302D


Key Features

- Broad Frequency Range: 2GHz-4GHz
- High Isolation, Low Insertion Loss
- High Power Handling
- Wide Operating Temperature: -30°C~+70°C
- Commercial, Military and Space Applications

Electrical Specifications at Room (25°C±5°C) Temperature

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max. (dB)	Isolation Min. (dB)	VSWR Max.	Forward Power (W)	Connector Type
KTDC-302D	2 - 4	750	0.6	18	1.35	20	TAB
KTDC-302D	3 - 4	full	0.6	18	1.35	20	TAB

Mechanical Dimensions (mm)

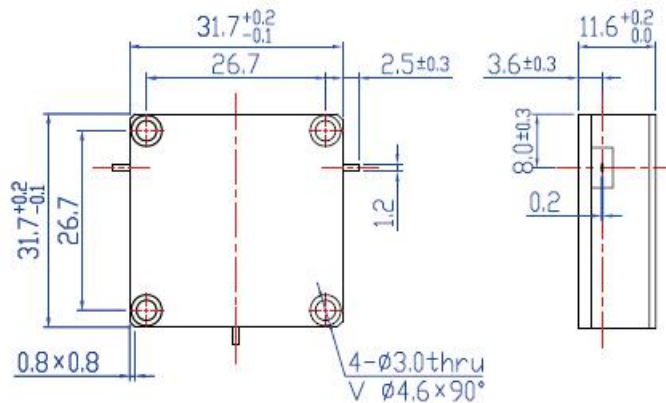

HOW TO ORDER

